


# VI 500-1500 R1U



- Pure Sine Wave Output
- Human Interface Device (HID) supported
- Slim 1U design
- Includes a Intelligent Slot

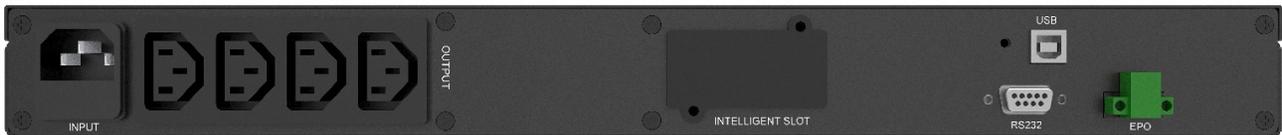

The PowerWalker VI R1U is a line interactive 1U rack UPS solution. Thanks to its 1U design, the UPS fits in nearly every setting, and fits perfectly for applications where space is a main concern (they also have a very low-depth, only 216 mm for the smaller models). It is equipped with pure sine wave output, and it includes an intelligent card slot for network cards, so that even sensitive and critical loads can be kept safe.

Considering that the fan is completely switched off in normal operation and the LCD dims out automatically, neither noise nor LCD lighting will disturb you. The PowerWalker VI R1U is a flexible all-rounder for home and semi-professional environments.

General Features	Values			
Power Capacity	500VA/ 300W	750VA/ 450W	1000VA/ 600W	1500VA/ 900W
Output Power Factor	0.60			
LINE Mode Full Load	95.0%			
Charger	1A			
Input Specifications	Values			
Input Voltage Range	165-290 VAC			
Frequency (Synchronized Range)	50Hz or 60Hz			
Input Type	IEC C14 or IEC C14 <sup>UK</sup>			
Output Specifications	Values			
Nominal Output Voltage	230 VAC			
Voltage Regulation	+/- 10%			
Frequency (Battery Mode)	+/- 0.5Hz			
Outlets	IEC C13 (4)			
Battery Specifications	Values			
Batteries	2 x 6V/ 7Ah	2 x 6V/ 9Ah	4 x 6V/ 7Ah	4 x 6V/ 9Ah
DC Voltage	2 x 6V		4 x 6V	
Recharge Time	8h to 90%			
Half Load Backup Time	10.3 min	8.7 min	10.3 min	8.7 min
Transfer Time [AC to Battery]	4ms			